

Copyright c 2010. Tutti i diritti sulle immagini ed i testi sono riservati. Sono vietate la riproduzione e diffusione, anche parziale, in qualsiasi forma, delle fotografie e dei testi. I trasgressori saranno perseguiti a norma di legge. Tutti i prodotti illustrati costituiscono creazione di proprietà della società Gruppo Piazzetta SpA. Ogni diritto di sfruttamento dei modelli è riservato. Il marchio/ed i segni distintivi della società sono di proprietà esclusiva della stessa.



C DUE

The performance of the stove is combined with the magical atmosphere created by a fireplace. The gently rounded shapes heighten the pleasurable effect of the fire.



Blu
Genziana



Ollare



Beige
Sabbia



Bianco
Meringa



Bordeaux

GENERAL TECHNICAL CHARACTERISTICS

Natural heating distribution

Radiant, conduction and natural convection heating

Heating with Multifuoco System®

Optional forced ventilation kit with 4 speed settings with remote control. Air ducting up to 10 m

Structure

Inset (555T A or 555T SL) and door in steel, grate and hood in cast iron, firebox in Aluker®

Cladding

Large hand-made pieces, stainless steel and sanded glass ledge

Air Glass System

Self-cleaning ceramic glass resistant up to 750°C


Easy Cleaning

Quick and easy maintenance, removable ash pan

Door

Left opening on 555T A inset and silicon handle. Rise n' fall door also hinged for easy cleaning on 555T SL inset

TECHNICAL DRAWING

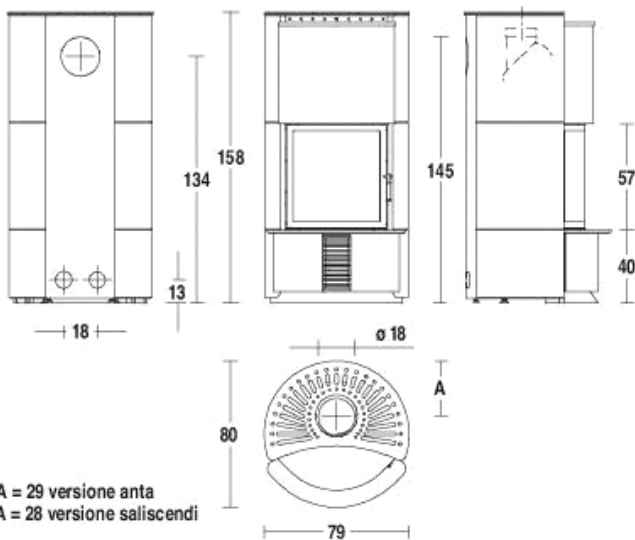

TECHNICAL DATA

Room heating capacity (min-max)	m ³	120 - 200
Nominal thermal efficiency	%	78,0
Rated heat output	kW	7,0
Consumption at rated heat output	Kg/h	7,0
Maximum heat output	kW	10,0
Maximum consumption		3,5
Dimensions WxDxH	cm	79 x 80 x 158
Cladding		maiolica
Front		acciaio inox e verniciato
Firebox		acciaio
Primary and secondary air		primaria regolabile secondaria predeterminata
Air combustion kit		
Firebox		Aluker
Brazier		ghisa
Flue outlet Ø	cm	18 superiore o posteriore
Ash drawer		estraibile
Door		acciaio
Ceramic glass		resistente a 750°C autopulente
Door handle		acciaio
Wellness -umidifier in stainless steel		no
Oven in stainless steel (LxWxH)	cm	
Multifuoco System®		optional
Front air vents-orientable		si/no
Forced Convection kit		
Total weight	Kg	200

The availability of models may vary from Country to Country.



IMPORT
BENELUX 