


Copyright c 2010. Tutti i diritti sulle immagini ed i testi sono riservati. Sono vietate la riproduzione e diffusione, anche parziale, in qualsiasi forma, delle fotografie e dei testi. I trasgressori saranno perseguiti a norma di legge. Tutti i prodotti illustrati costituiscono creazione di proprietà della società Gruppo Piazzetta SpA. Ogni diritto di sfruttamento dei modelli è riservato. Il marchio/i ed i segni distintivi della società sono di proprietà esclusiva della stessa.



C UNO

With this splendid vertical view of the flame, C UNO exerts its full appeal in the centre of a room. It can also be installed against a wall.

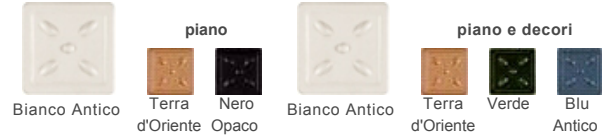

GENERAL TECHNICAL CHARACTERISTICS

Natural heating distribution

Radiant, conduction and natural convection heating

Heating with Multifuoco System®

Optional forced ventilation kit with 4 speed settings with remote control. Air ducting up to 10 m

Structure

Inset (555T A or 555T SL) and door in steel, grate and hood in cast iron, firebox in Aluker®

Majolica cladding

Unique large hand-made pieces

Air Glass System

Self-cleaning ceramic glass resistant up to 750°C


Easy Cleaning

Quick and easy maintenance, removable ash pan

Door

Left opening on 555T A inset and silicon handle. Rise n' fall door also hinged for easy cleaning on 555T SL inset

TECHNICAL DRAWING

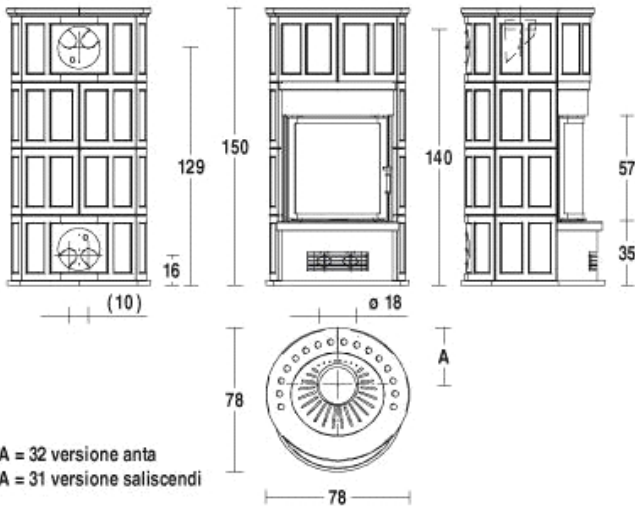

TECHNICAL DATA

Room heating capacity (min-max)	m ³	120 - 200
Nominal thermal efficiency	%	78,0
Rated heat output	kW	7,0
Consumption at rated heat output	Kg/h	2,3
Maximum heat output	kW	10,0
Maximum consumption		3,5
Dimensions WxDxH	cm	78 x 78 x 150
Cladding		maiolica
Front		maiolica
Firebox		acciaio
Primary and secondary air		primaria regolabile secondaria predeterminata
Air combustion kit		
Firebox		Aluker
Brazier		ghisa
Flue outlet Ø	cm	18 superiore o posteriore
Ash drawer		estraibile
Door		acciaio
Ceramic glass		resistente a 750°C autopulente
Door handle		acciaio
Wellness -umidifier in stainless steel		no
Oven in stainless steel (LxWxH)	cm	
Multifuoco System®		optional
Front air vents-orientable		si/si
Forced Convection kit		
Total weight	Kg	305

The availability of models may vary from Country to Country.



IMPORT
BENELUX  PIAZZETTA