



## DOVER

Great care over detail and technological research have gone into the making of Dover. Its square shape makes it ideal for corner installations, while the glass has been specially shaped so that the fire can be seen from two sides.



### GENERAL TECHNICAL CHARACTERISTICS

#### Natural heating distribution

Radiant, conduction and natural convection heating

#### Heating with Multifuoco System®

Optional forced ventilation kit with 4 speed settings with remote control. Air ducting up to 10 m

#### Structure

Inset 510 SL and door in steel, grate and hood in cast iron, firebox in Aluker®

#### Cladding

Enamelled steel


#### Air Glass System

Self-cleaning ceramic glass resistant up to 750°C

#### Easy Cleaning

Quick and easy maintenance, removable ash pan

### TECHNICAL DRAWING

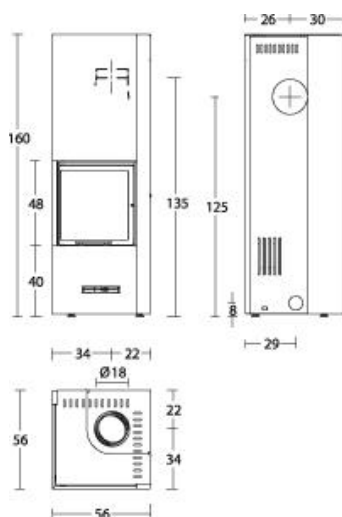

### TECHNICAL DATA

Room heating capacity (min - max)	m <sup>3</sup>	135 - 230
Nominal thermal efficiency	%	83,0
Rated heat output	kW	8,0
Consumption at rated heat output	Kg/h	2,1
Maximum heat output	kW	10,0
Maximum consumption		3,5
Dimensions WxDxH	cm	56 x 56 x 160
Cladding		acciaio verniciato
Front		acciaio verniciato
Firebox		acciaio
Primary and secondary air		primaria regolabile secondaria predeterminata
Air combustion kit		
Firebox		Aluker
Brazier		ghisa
Flue outlet $\varnothing$	cm	18 superiore o posteriore
Ash drawer		estraibile
Door		acciaio verniciato
Ceramic glass		resistente a 750°C autopulente
Door handle		acciaio verniciato
Wellness -umidifier in stainless steel		no
Oven in stainless steel (LxWxH)	cm	
Multifuoco System®		optional
Front air vents-orientable		si/si
Forced Convection kit		
Total weight	Kg	215

The availability of models may vary from Country to Country.



IMPORT  
BENELUX