

Copyright c. 2010. Tutti i diritti sulle immagini ed i testi sono riservati. Sono vietate la riproduzione e diffusione, anche parziale, in qualsiasi forma, delle fotografie e dei testi. I trasgressori saranno perseguiti a norma di legge. Tutti i prodotti illustrati costituiscono creazione di proprietà della società Gruppo Piazzetta SpA. Ogni diritto di sfruttamento dei modelli è riservato. I/II marchio/i ed i segni distintivi della società sono di proprietà esclusiva della stessa.



# ORTISEI

A two-part stove clad with large majolica elements increases the thermal 'flywheel' effect to give exceptional comfort over a prolonged period.

## Versione Tinta Unita



## Versione Bicolore



## GENERAL TECHNICAL CHARACTERISTICS

**Natural heating distribution**  
Radiant, conduction and natural convection heating

**Heating with Multifuoco System®**  
Four speed optional forced ventilation kit with remote control.  
Warm air ducting up to 10 m

**Structure**  
Enamelled steel with door and grate in cast iron, firebox in Aluker®, support in enamelled steel. Steel handle with silicon sleeve or in majolica on versions Bianco and Bianco Antico with decorations

**Combustion air kit**  
Optional system to optimise combustion and stove efficiency, taking in fresh air from outside the dwelling


**Majolica cladding**  
Unique large hand-made pieces

**Easy Cleaning**  
Quick and easy maintenance, removable ash drawer

**Safety devices**  
Automatically closing door

**Smoke exchangers**  
Optional, recovers heat from smoke thus maximizing the efficiency

## TECHNICAL DRAWING

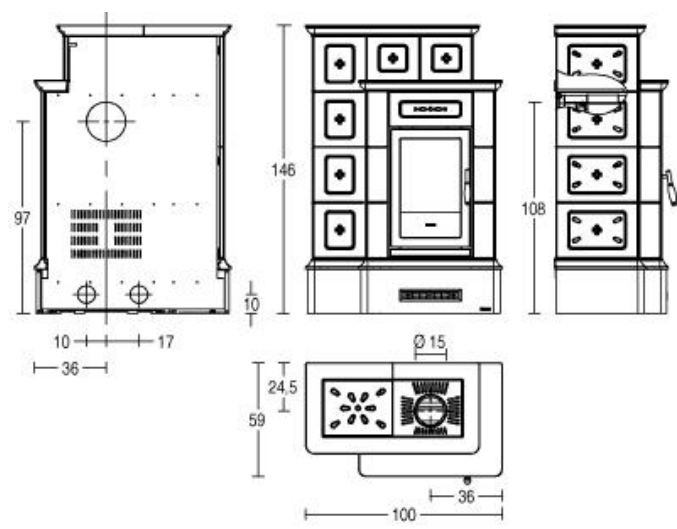

## TECHNICAL DATA

Room heating capacity (min-max)	m <sup>3</sup>	135 - 230
Nominal thermal efficiency	%	80,8
Rated heat output	kW	8,0
Consumption at rated heat output	Kg/h	2,0
Maximum heat output	kW	10,0
Maximum consumption		2,9
Dimensions WxDxH	cm	100 x 59 x 146
Cladding		maiolica
Front		maiolica
Firebox		acciaio
Primary and secondary air		regolabile più terziaria predeterminata
Air combustion kit		optional
Firebox		Aluker
Brazier		ghisa
Flue outlet Ø	cm	15 superiore o posteriore
Ash drawer		estraibile
Door		ghisa
Ceramic glass		resistente a 750°C autopulente
Door handle		acciaio con impugnatura in materiale silicónico o maiolica
Wellness -umidifier in stainless steel		no
Oven in stainless steel (LxWxH)	cm	
Multifuoco System®		optional
Front air vents-orientable		si/si
Forced Convection kit		no
Total weight	Kg	353

The availability of models may vary from Country to Country.