

Copyright c. 2010. Tutti i diritti sulle immagini ed i testi sono riservati. Sono vietate la riproduzione e diffusione, anche parziale, in qualsiasi forma, delle fotografie e dei testi. I trasgressori saranno perseguiti a norma di legge. Tutti i prodotti illustrati costituiscono creazione di proprietà della società Gruppo Piazzetta SpA. Ogni diritto di sfruttamento dei modelli è riservato. Il marchio/ed i segni distintivi della società sono di proprietà esclusiva della satessa.



## LINE

Original shaped cladding frames the firebox, giving the appliance a particularly innovative look that goes hand in hand with the latest technology.



Grigio Cerato



Bianco Antico



Rosso Lava



Giallo Acceso



Sahara



Terra Cotta

### GENERAL TECHNICAL CHARACTERISTICS

#### Multifuoco System®

Three speed forced ventilation system.  
Warm air ducting up to 16 m

#### Multifunction remote control

LCD display, timer, thermostat and Multicomfort function

#### Programming

Daily, weekly and weekend modes.  
Dual time settings

#### Remote Control System

Optional kit for remote control of stove with a simple SMS

#### Structure

Enamelled steel with door, brazier and firebox in cast iron

#### Majolica cladding

Unique large hand-made pieces

#### Air Glass System

Self-cleaning ceramic glass resistant up to 750°C

#### Energy Saving

Quick and easy maintenance, removable ash drawer

#### Wellness

Humidifier with aroma diffuser


#### Eco function

Automatic power control of the fire

#### Pellet Level Sensor

Allows to monitor the amount of pellet in the hopper, displaying an alert when refilling is required.

### TECHNICAL DRAWING

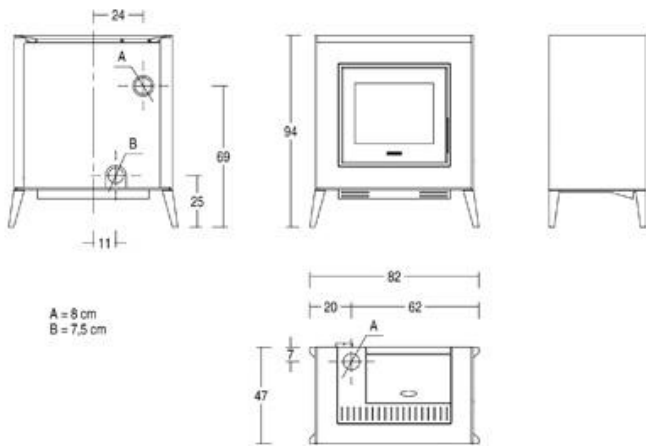

### TECHNICAL DATA

Room heating capacity (min-max)	m <sup>3</sup>	145 - 250
Rated heat output (min-max)	kW	2,7 - 8,6
Power adjustable (positions)		4
Nominal thermal efficiency	%	89,3
Consumption at rated heat output (min-max)	Kg/h	0,6 - 1,9
Dimensions WxDxH	cm	82x47x93,5
Cladding/front		majolica
Firebox		steel
Baffle plate/Firebox/Brazier		cast iron
Flue outlet Ø	cm	8 - central rear
Flue direction options		top left
Ash drawer		no
Door		cast iron
Ceramic glass		self-cleaning resistant up to 750° C
Door handle		hide away and detachable
Hopper capacity	Kg	16
Umidifier in stainless steel		yes
Oven in stainless steel (LxWxH)	cm	no
Multifuoco System®		3 levels speed
Dual Power		no
Remote control		display LCD
Stove control panel		with digital control
Timer -thermostat with programming		Daily, weekly and week-end with two times
Remote Control System		optional
Front air vents-orientable		yes
Lateral vents		no
Minimum power consumption	Watt	100
Maximum power consumption	Watt	380
Total weight	Kg	

The availability of models may vary from Country to Country.