



P958 D

With its simple cladding, geometric decoration and sliding top, this appliance in minimalist style is in harmony with current trends.



Bianco Antico



Rosso Lava



Giallo Acceso



Canapa



Ardesia



Terra Cotta



GENERAL TECHNICAL CHARACTERISTICS

Multifuoco System®

Three speed forced ventilation system.
Warm air ducting up to 16 m

Multifunction remote control

LCD display, timer, thermostat and Multicomfort function

Programming

Daily, weekly and weekend modes.
Dual time settings

Remote Control System

Optional kit for remote control of stove with a simple SMS

Structure

Enamelled steel with door, brazier and firebox in cast iron

Majolica cladding

Unique large hand-made pieces

Rolling Top

Upper cover plate on sliding tracks to access hopper

Air Glass System

Self-cleaning ceramic glass resistant up to 750°C

Energy Saving

Quick and easy maintenance, removable ash drawer

Wellness

Humidifier with aroma diffuser


Eco function

Automatic power control of the fire

Pellet Level Sensor

Allows to monitor the amount of pellet in the hopper, displaying an alert when refilling is required.

TECHNICAL DRAWING

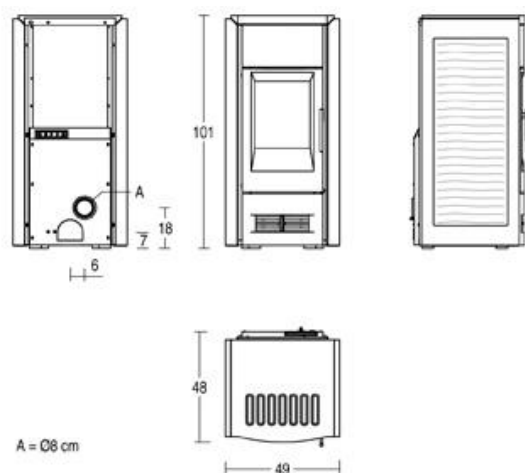

TECHNICAL DATA

Room heating capacity (min-max)	m ³	145 - 250
Rated heat output (min-max)	kW	2,7 - 8,6
Power adjustable (positions)		4
Nominal thermal efficiency	%	89,3
Consumption at rated heat output (min-max)	Kg/h	0,6 - 1,9
Dimensions WxDxH	cm	49x48x101
Cladding/front		majolica / enamelled steel
Firebox		steel
Baffle plate/Firebox/Brazier		cast iron
Flue outlet Ø	cm	8 - posteriore di serie
Flue direction options		no
Ash drawer		removable
Door		cast iron
Ceramic glass		self-cleaning resistant up to 750° C
Door handle		steel with nichel plated finish
Hopper capacity	Kg	16
Umidifier in stainless steel		yes
Oven in stainless steel (LxWxH)	cm	no
Multifuoco System®		3 levels speed
Dual Power		no
Remote control		display LCD
Stove control panel		with digital control
Timer -thermostat with programming		daily, weekly and week-end with two times
Remote Control System		optional
Front air vents-orientable		si - sis
Lateral vents		no
Minimum power consumption	Watt	100
Maximum power consumption	Watt	380
Total weight	Kg	148

The availability of models may vary from Country to Country.



PerSempire : Liezeledorp 82 - 2870 Puurs
Tel.: (+32) 03 535 20 00 • Tech.: (+32) 03 535 20 01
info@persempire.be | www.persempire.be