

Copyright c. 2010. Tutti i diritti sulle immagini ed i testi sono riservati. Sono vietate la riproduzione e diffusione, anche parziale, in qualsiasi forma, delle fotografie e dei testi. I trasgressori saranno perseguiti a norma di legge. Tutti i prodotti illustrati costituiscono creazione di proprietà della società Gruppo Piazzetta SpA. Ogni diritto di sfruttamento dei modelli è riservato. Il marchio/ed i segni distintivi della società sono di proprietà esclusiva della stessa.



P963 M THERMO

Minimalistic lines present on prestigious hand-made maiolica stoves enhance any room. While engineered for water heating and absolute comfort.



Ollare



Nero Opaco

GENERAL TECHNICAL CHARACTERISTICS

Heating

Production of hot water for the heating system or to integrate the existing water heating system

Multifunction remote control

LCD display, ignition, shutdown, programming the timer thermostat and setting the water temperature

Programming

Dual time settings

Structure

Stove body and boiler in steel, brazier in cast iron, firebox in Aluker® and steel, door in cast iron. Closed expansion tank, water pump and standard safety devices

Rolling Top

Upper cover plate on sliding tracks to access hopper

Majolica cladding

Unique large hand-made pieces

Air Glass System

Self-cleaning ceramic glass resistant up to 750°C


Energy Saving

Automatic on/off to maximize savings

Eco function

Automatic power control of the fire

TECHNICAL DRAWING

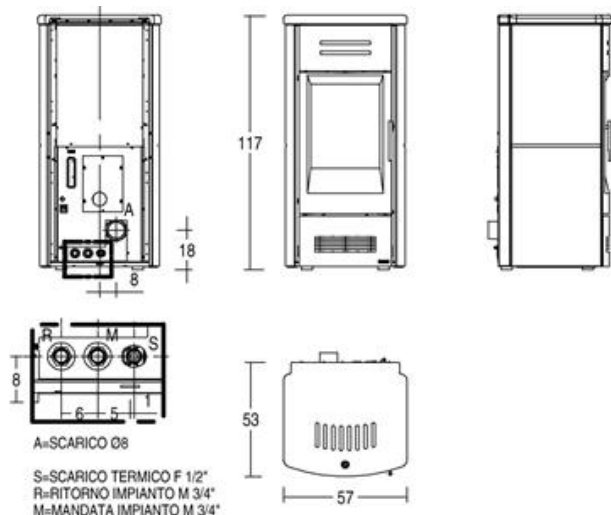

TECHNICAL DATA

Rated heat output (min-max)	kW	6,5 - 15,5
Heat output to the water (min-max)	kW	5 - 12,5
Power adjustable (positions)		5
Nominal thermal efficiency (min-max)	%	90,5 - 92,0
Consumption at rated heat output (min-max)	Kg/h	1,5 - 3,5
Dimensions WxDxH	cm	57 x 53 x 117
Cladding/front		majolica/enamelled steel
Firebox		steel
Baffle plate		steel
Firebox		Aluker
Brazier		cast iron
Flue outlet Ø	cm	8
Boiler		steel
Circulation pump and safeties		standard
Expansion tank		closed
Sanitary hot water kit		
Ash drawer		removable
Door		cast iron
Ceramic glass		self-cleaning resistant up to 750°C
Door handle		steel with nickel-plated finish
Hopper capacity		30
Stove control panel		with digital controls
Timer -thermostat with programming		daily with dual time settings
Minimum power consumption	Watt	130
Maximum power consumption	Watt	410
Total weight	Kg	223

The availability of models may vary from Country to Country.