

Copyright c. 2010. Tutti i diritti sulle immagini ed i testi sono riservati. Sono vietate la riproduzione e diffusione, anche parziale, in qualsiasi forma, delle fotografie e dei testi. I trasgressori saranno perseguiti a norma di legge. Tutti i prodotti illustrati costituiscono creazione di proprietà della società Gruppo Piazzetta SpA. Ogni diritto di sfruttamento dei modelli è riservato. Il marchio/ed i segni distintivi della società sono di proprietà esclusiva della stessa.



P963 THERMO

This stove with superlative majolica cladding can heat a medium sized environment.



GENERAL TECHNICAL CHARACTERISTICS

Heating
Production of hot water for the heating system or to integrate the existing water heating system

Multifunction remote control
LCD display, ignition, shutdown, programming the timer thermostat and setting the water temperature

Programming
Dual time settings

Structure
Stove body and boiler in steel, brazier in cast iron, firebox in Aluker® and steel, door in cast iron. Closed expansion tank, water pump and standard safety devices

Rolling Top
Upper cover plate on sliding tracks to access hopper


Majolica cladding
Unique large hand-made pieces

Air Glass System
Self-cleaning ceramic glass resistant up to 750°C

Energy Saving
Automatic on/off to maximize savings

Eco function
Automatic power control of the fire

TECHNICAL DRAWING

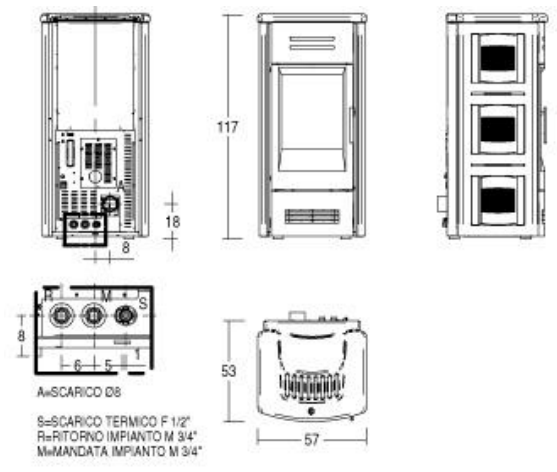

TECHNICAL DATA

Rated heat output (min-max)	kW	8,0 - 15,5
Heat output to the water (min-max)	kW	6,0 - 13,0
Power adjustable (positions)		5
Nominal thermal efficiency (min-max)	%	91,0 - 91,5
Consumption at rated heat output (min-max)	Kg/h	1,8 - 4
Dimensions WxDxH	cm	57 x 53 x 117
Cladding/front		maiolica/acciaio verniciato
Firebox		acciaio
Baffle plate		acciaio
Firebox		Aluker
Brazier		ghisa
Flue outlet Ø	cm	8
Boiler		acciaio
Circulation pump and safeties		di serie
Expansion tank		chiuso
Sanitary hot water kit		
Ash drawer		estraibile
Door		ghisa
Ceramic glass		resistente a 750°C autopulente
Door handle		acciaio con finitura nichelata
Hopper capacity		30
Stove control panel		a comandi digitali
Timer -thermostat with programming		giornaliera con due fasce orarie
Minimum power consumption	Watt	130
Maximum power consumption	Watt	410
Total weight	Kg	223

The availability of models may vary from Country to Country.